

CONOFLAT

- straightlined, purist design
- high level of comfort thanks to the flat enamelled waste cover that is flush with the shower area
- can be installed to be absolutely flush with the floor
- made of KALDEWEI steel enamel 3,5 mm
- ideally complements the CONODUO bath
- designed by Sottsass Associati
- drainage capacity KA 120: 0,85 l/s
- drainage capacity KA 120 vertical: 1,4 l/s



Similar illustration

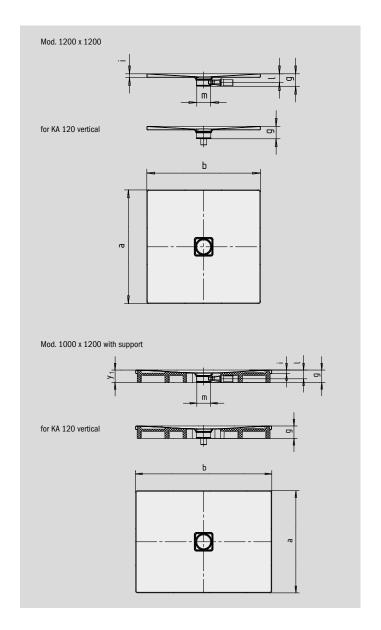

SECURE^[+]

| Model No. | | 792 | 793 | 794 | 795 | 796 | 855 |
|---|-------|------------|------------|------------|------------|------------|---------------|
| External length | a | 900 | 1000 | 800 | 900 | 1000 | 800 mm |
| External width | b | 1300 | 1300 | 1400 | 1400 | 1400 | 1500 mm |
| Height with siphon | g | 107 | 107 | 107 | 107 | 107 | 107 mm |
| Height of rim | i | 32 | 32 | 32 | 32 | 32 | 32 mm |
| Diameter of drain hole | m | 120 | 120 | 120 | 120 | 120 | 120 mm |
| Siphon connection height | 1 | 76 | 76 | 76 | 76 | 76 | 76 mm |
| Height with support | y_1 | 110 | 110 | 110 | 110 | 110 | 110 mm |
| Weight of the enamelled shower tray in kg | | 30 | 34 | 29 | 32 | 36 | 33 |
| Anti-slip | | 492 x 492 | 588 x 588 | 492 x 492 | 492 x 492 | 588 x 588 | 492 x 492 mm |
| Full anti-slip | | 836 x 1220 | 932 x 1220 | 740 x 1316 | 836 x 1316 | 932 x 1316 | 740 x 1412 mm |



The TÜV Rheinland confirms the following properties of KALDEWEI's anti-slip and full anti-slip finish:

- \bullet Assessment group \boldsymbol{B} for wet barefoot areas (DIN 51097)
- Assessment group R 10 for slip-resistant properties in work rooms and areas with an increased risk of slipping (DIN 51130)

All CONOFLAT models are available with ${\it full\ anti-slip}$ finish.

